March 1998

FAIRCHILD


DM74LS251 3-STATE Data Selectors/Multiplexers

General Description

These data selectors/multiplexers contain full on-chip binary decoding to select one-of-eight data sources, and feature a strobe-controlled 3-STATE output. The strobe must be at a low logic level to enable these devices. The 3-STATE outputs puts permit direct connection to a common bus. When the strobe input is high, both outputs are in a high-impedance state in which both the upper and lower transistors of each totem-pole output are off, and the output neither drives nor loads the bus significantly. When the strobe is low, the outputs are activated and operate as standard TTL totem-pole outputs.

To minimize the possibility that two outputs will attempt to take a common bus to opposite logic levels, the output control circuitry is designed so that the average output disable time is shorter than the average output enable time.

Connection Diagram



Order Number DM54LS251J, DM54LS251W, DM74LS251M or DM74LS251N See Package Number J16A, M16A, N16E or W16A

Features

- 3-STATE version of LS151
- Interface directly with system bus
- Perform parallel-to-serial conversion
- Permit multiplexing from N-lines to one line
- Complementary outputs provide true and inverted data
- Maximum number of common outputs
 - 54LS 49 74LS 129
- Typical propagation delay time (D to Y) 54LS 17 ns 74LS 17 ns
- Typical power dissipation 54LS 35 mW 74LS 35 mW

Function Table

Inputs				Out	puts
Select			Strobe	Y	W
С	В	Α	S		
Х	Х	Х	Н	Z	Z
L	L	L	L	D0	D0
L	L	н	L	D1	D1
L	н	L	L	D2	D2
L	н	н	L	D3	D3
н	L	L	L	D4	D4
н	L	н	L	D5	D5
н	н	L	L	D6	D6
н	н	н	L	D7	D7

H = High Logic Level, L = Low Logic Level,

X = Don't Care, Z = High Impedance (Off)

D0, D1...D7 = The level of the respective D input

© 1998 Fairchild Semiconductor Corporation DS006415

www.fairchildsemi.com

Absolute	Maximum	Ratings (Note 1)
----------	---------	------------------

Supply Voltage
Input Voltage
Operating Free Air Temperature Range

DM54LS DM74LS Storage Temperature Range -55°C to +125°C 0°C to +70°C -65°C to +150°C

Recommended Operating Conditions

Symbol	Parameter	DM54LS251			DM74LS251			Units
		Min	Nom	Max	Min	Nom	Max	1
V _{cc}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage	2			2			V
VIL	Low Level Input Voltage			0.7			0.8	V
I _{он}	High Level Output Current			-1			-2.6	mA
I _{OL}	Low Level Output Current			12			24	mA
T _A	Free Air Operating Temperature	-55		125	0		70	°C

7V

7V

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ (Note 2)	Max	Units
VI	Input Clamp Voltage	V_{CC} = Min, I _I = -18 mA				-1.5	V
V _{он}	High Level Output	V _{CC} = Min, I _{OH} = Max	DM54	2.4	3.4		V
	Voltage	V _{IL} = Max, V _{IH} = Min	DM74	2.4	3.1		
V _{OL}	Low Level Output	V _{CC} = Min, I _{OL} = Max	DM54		0.25	0.4	
	Voltage	V _{IL} = Max, V _{IH} = Min	DM74		0.35	0.5	V
		I_{OL} = 12 mA, V_{CC} = Min	DM74		0.25	0.4	
l _i	Input Current @ Max	$V_{CC} = Max, V_I = 7V$				0.1	mA
	Input Voltage						
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.7V				20	μA
I _{IL}	Low Level Input Current	$V_{\rm CC}$ = Max, $V_{\rm I}$ = 0.4V				-0.4	mA
I _{OZH}	Off-State Output Current	$V_{\rm CC}$ = Max, $V_{\rm O}$ = 2.7V					
	with High Level Output	V _{IH} = Min, V _{IL} = Max	V _{IH} = Min, V _{IL} = Max			20	μA
	Voltage Applied						
l _{ozl}	Off-State Output Current	$V_{\rm CC}$ = Max, $V_{\rm O}$ = 0.4V					
	with Low Level Output	V _{IH} = Min, V _{IL} = Max				-20	μA
	Voltage Applied						
l _{os}	Short Circuit	V _{CC} = Max	DM54	-20		-100	mA
	Output Current	(Note 3)	DM74	-20		-100	
I _{CC1}	Supply Current	V _{CC} = Max (Note 4)			6.1	10	mA
I _{CC2}	Supply Current	V _{CC} = Max (Note 5)			7.1	12	mA

Note 2: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.


Note 4: I_{CC1} is measured with the outputs open, STROBE grounded, and all other inputs at 4.5V.

Note 5: I_{CC2} is measured with the outputs open and all inputs at 4.5V.


		From (Input)		R _L =	667 Ω			
Symbol	Parameter	to (Output)	C _L =	45 pF	C _L =	150 pF	Units	
			Min	Max	Min	Max		
t _{PLH}	Propagation Delay Time	A, B, C		45		53	ns	
	Low to High Level Output	(4 Levels) to Y						
t _{PHL}	Propagation Delay Time	A, B, C		45		53	ns	
	High to Low Level Output	(4 Levels) to Y						
t _{PLH}	Propagation Delay Time A, B, C 33	33		38	ns			
	Low to High Level Output	ligh Level Output (3 Levels) to W						
t _{PHL}	Propagation Delay Time	A, B, C		33		42	ns	
	High to Low Level Output	(3 Levels) to W						
t _{PLH}	Propagation Delay Time D 28	28		35	ns			
	Low to High Level Output	to Y						
t _{PHL}	Propagation Delay Time	D		28		38	ns	
	High to Low Level Output	to Y						
t _{PLH}	Propagation Delay Time D 15	15		25	ns			
	Low to High Level Output	to W						
t _{PHI}	Propagation Delay Time	D		15		25	ns	
	High to Low Level Output	to W						
t _{PZH}	Output Enable Time to	Strobe		45		60	ns	
	High Level Output	to Y						
t _{PZL}	Output Enable Time to	Strobe		40		51	ns	
	Low Level Output	to Y						
t _{PHZ}	Output Disable Time from	Strobe		45			ns	
	High Level Output (Note 6)	to Y						
t _{PLZ}	Output Disable Time from	Strobe		25			ns	
	Low Level Output (Note 6)	to Y						
t _{PZH}	Output Enable Time to	Strobe		27		40	ns	
	High Level Output	to W						
t _{PZL}	Output Enable Time to	Strobe		40		47	ns	
	Low Level Output	to W						
t _{PHZ}	Output Disable Time from	Strobe		55			ns	
	High Level Output (Note 6)	to W						
t _{PLZ}	Output Disable Time from	Strobe		25			ns	
	Low Level Output (Note 6)	to W						


Note 6: C_L = 5 pF


www.fairchildsemi.com

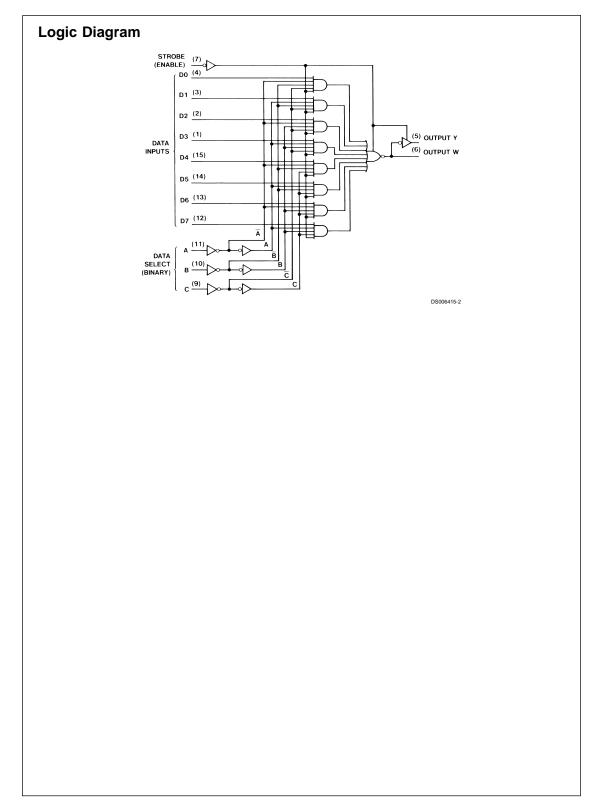

www.fairchildsemi.com

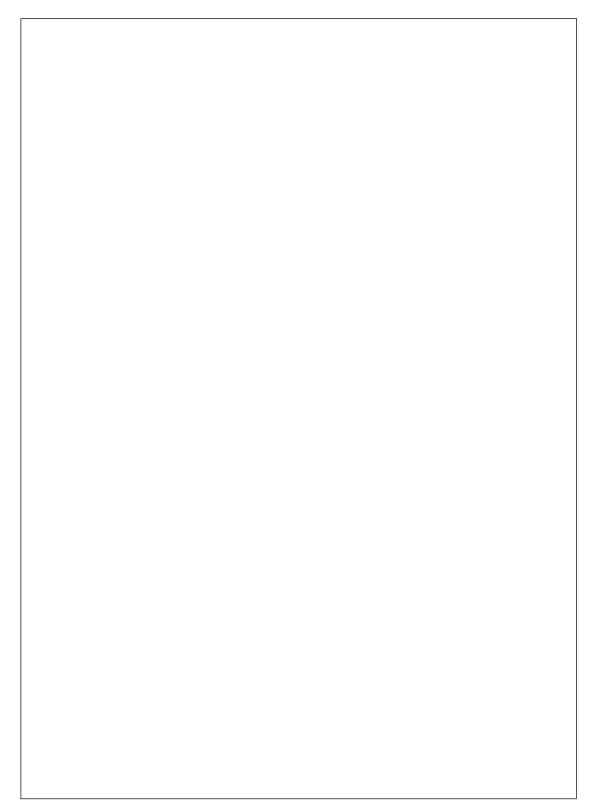

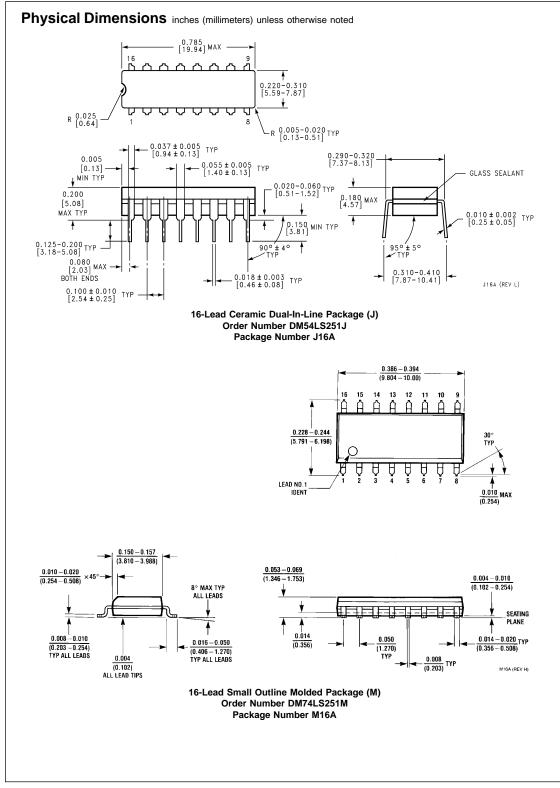

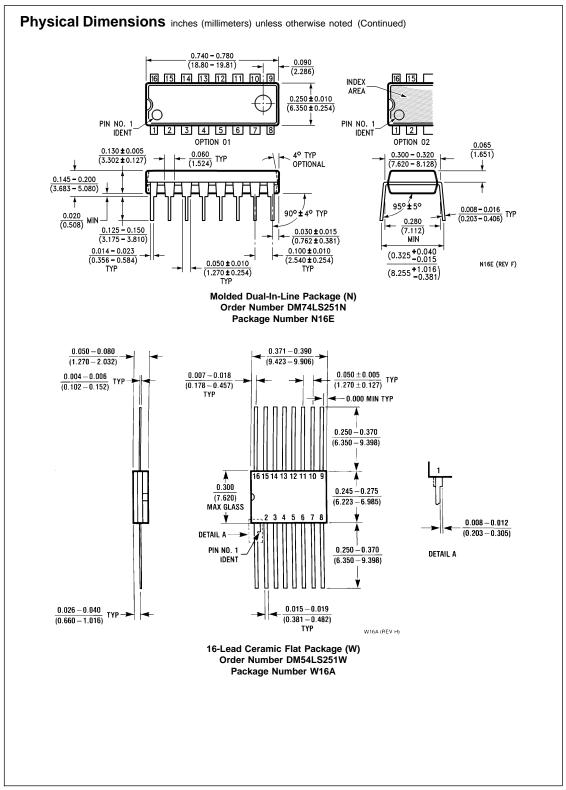

www.fairchildsemi.com

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DE-VICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMI-CONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor	Fairchild Semiconductor	Fairchild Semiconductor	National Semiconductor
Corporation	Europe	Hong Kong Ltd.	Japan Ltd.
Americas	Fax: +49 (0) 1 80-530 85 86	13th Floor, Straight Block,	Tel: 81-3-5620-6175
Customer Response Center	Email: europe.support@nsc.com	Ocean Centre, 5 Canton Rd.	Fax: 81-3-5620-6179
Tel: 1-888-522-5372	Deutsch Tel: +49 (0) 8 141-35-0	Tsimshatsui, Kowloon	
	English Tel: +44 (0) 1 793-85-68-56	Hong Kong	
	Italy Tel: +39 (0) 2 57 5631	Tel: +852 2737-7200	
vww.fairchildsemi.com		Fax: +852 2314-0061	

Fairchild does not assume any responsibility for use of any circuity described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.